


REV.	DESCRIPTION	DATE	BY

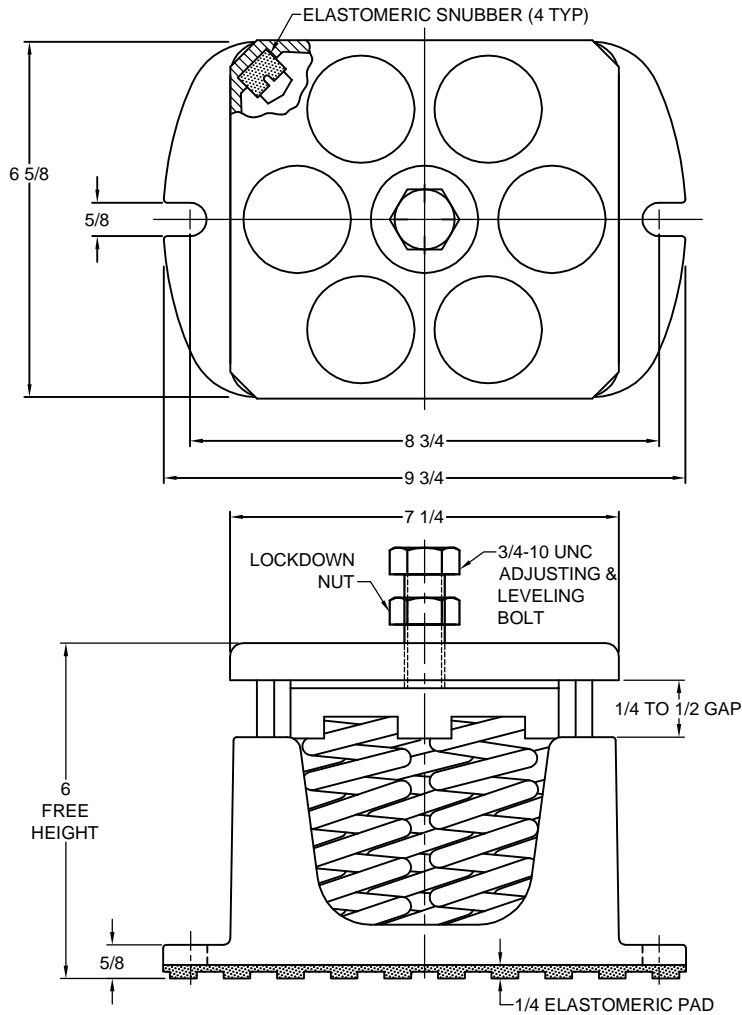

- NOTES:
1. ALL DIMENSIONS ARE IN INCHES. INTERPRET PER ANSI Y-14.
 2. FINISH: HOUSINGS- CAST IRON, SPRINGS- POWDER COAT, HARDWARE: ZINC-ELECTROPLATE.
 3. REFER TO DRAWING 2 OF 2 FOR INSTALLATION INSTRUCTIONS.
 4. INNER SPRING (WHEN USED) NOT SHOWN.
 5. ALL SPRINGS ARE DESIGNED WITH 50% OVER-TRAVEL.

TYPE C7E-1D CAST IRON SPRING-FLEX MOUNTINGS WITH EXTERNAL ADJUSTMENT

MODEL	MAX LOAD (LBS)	DEFLECTION (IN)	SPRING RATE (LB/IN)	SPRING COLOR CODE
C7E-1D-2380	2380	1.13	2100	RED
C7E-1D-3570	3570	1.02	3500	BLACK
C7E-1D-4725	4725	1.32	3591	DK PURPLE
C7E-1D-6300	6300	1.02	6167	DK GREEN
C7E-1D-8400	8400	0.90	9289	GRAY
C7E-1D-9520	9520	0.77	12306	WHITE
C7E-1D-12495N ¹	12495	0.88	14203	GRAY/ RED

- NOTES:
1. TWO NESTED SPRINGS YIELD THIS LOAD. THE COLOR CODE IS FOR OUTER SPRING/ INNER SPRING



ISOLATOR SELECTIONS

LOC 1:	LOC 2:
LOC 3:	LOC 4:
LOC 5:	LOC 6:
LOC 7:	LOC 8:
CUSTOMER EQ'PT. TAG:	

NOTE: MATERIAL SHOWN IS FOR (1) SET.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER : _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

**SERIES C7E-1D
 CAST IRON SPRING-FLEX MOUNTINGS
 WITH EXTERNAL ADJUSTMENT
 1" NOMINAL DEFLECTION**



THE VMC GROUP
The Power of Together
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE:

NONE

SHEET:

1 OF 2

DRAWING NO.:

REVISION

