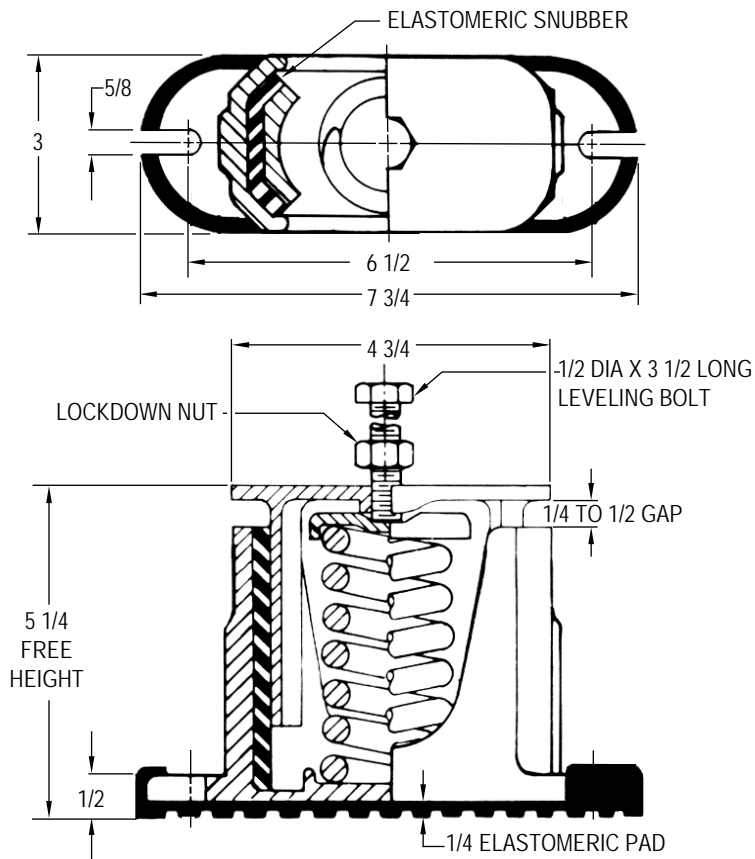


REV	DESCRIPTION	DATE	BY

**NOTES:**

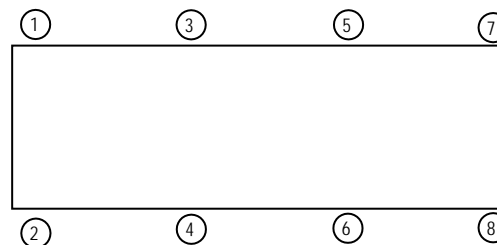
1. ALL DIMENSIONS ARE IN INCHES. INTERPRET PER ANSI Y-14.
2. FINISH: HOUSINGS CAST IRON- **ONE COAT BLACK PAINT**, SPRINGS- POWDER COAT, HARDWARE- ZINC ELECTROPLATE..
3. REFER TO DRAWING 2 OF 2 FOR INSTALLATION INSTRUCTIONS.
4. INNER SPRING (WHEN USED) NOT SHOWN.
5. ALL SPRINGS ARE DESIGNED WITH 50% OVER-TRAVEL.

**TYPE CE-1D CAST IRON SPRING-FLEX MOUNTINGS WITH EXTERNAL ADJUSTMENT**

MODEL	MAX LOAD (LBS)	DEFLECTION (IN)	SPRING RATE (LB/IN)	SPRING COLOR CODE
CE-1D-85	85	1.35	63	LT PURPLE
CE-1D-120	120	1.20	100	DK YELLOW
CE-1D-175	175	1.17	150	DK BLUE
CE-1D-250	250	1.40	179	YELLOW
CE-1D-340	340	1.13	300	RED
CE-1D-510	510	1.02	500	BLACK
CE-1D-675	675	1.32	513	DK PURPLE
CE-1D-900	900	1.02	881	DK GREEN
CE-1D-1200	1200	0.90	1327	GRAY
CE-1D-1360	1360	0.77	1758	WHITE
CE-1D-1785N <sup>1</sup>	1785	0.88	2029	GRAY/RED

**NOTES:**

1. TWO NESTED SPRINGS YIELD THIS LOAD. THE COLOR CODE IS FOR OUTER SPRING/ INNER SPRING.

**ISOLATOR SELECTIONS**

LOC 1:	LOC 2:
LOC 3:	LOC 4:
LOC 5:	LOC 6:
LOC 7:	LOC 8:
CUSTOMER EQP'T. TAG:	

NOTE: MATERIAL SHOWN IS FOR (1) SET.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

**CERTIFIED FOR:**


JOB NAME: \_\_\_\_\_

CUSTOMER: \_\_\_\_\_

CUSTOMER PO: \_\_\_\_\_

SALES ORDER: \_\_\_\_\_

**SERIES CE-1D  
CAST IRON SPRING-FLEX MOUNTINGS  
WITH EXTERNAL ADJUSTMENT  
1" NOMINAL DEFLECTION**

**SCALE:**

NONE

**SHEET:**

1 OF 2

**DRAWING NO.:****REVISION**