




Features

- Utilizes bellows mechanism to sense temperature
- High quality snap action switch
- Factory preset
- Shock and vibration resistant
- Available in a wide range of configurations
- NEMA 4, 13

Dimensions

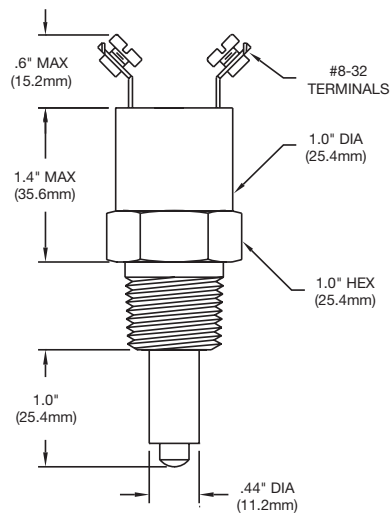

Operating Specifications

Set Point Range	40° – 300°F (4° – 149°C)
Set Point Tolerance	±5°F (2.8°C)
Maximum Temperature	100°F above set point (325°F max)
Differential	8 – 16°F
Current Rating	5 A @ 250 VAC 5 A @ 30 VDC (Resistive)
Media Connection	See Order Chart Below for Options
Circuit Form	SPST-NO or SPST-NC
Electrical Connection	See Order Chart Below for Options
Maximum External Pressure	500 PSI

How to Order

Example: Part Number: **TM – 6A – 120R / WL** *

TM – 6A – 120R / WL *				
Media Connection	Circuit Form	Fixed Set Point	Set Point Direction	Electrical Options
1 1/2" NPT Male 2 3/8" NPT Male 6 M16 x 1.5 7 1/2" BSPP Male (G1/2)	A SPST-NO B SPST-NC C SPDT	40°F – 300°F	R Rising F Falling	WL Wire Leads 18" QC 1/4" Spade Connection WP Weather Pack HR DIN43650A Connector MP Metri-Pack AT 10 A @ 125/250 VAC 5 A @ 30 VDC GG Internal Ground AU Gold Plate/Alloy for low currents

* Defaults to Screw Terminals