

Replacement Cords & Thermostats

Heat Shield

HS1



Use when exhaust manifold or turbo come close to heater termination.

For use with In-Block Direct Immersion heaters

Cord Length	Plug Style	120 Volt	240 Volt
6' 1.8m	1	IM6-1IN	IM6-2IN
11' 3.4m	1	IM11-1IN	IM11-2IN
16' 4.8m	1	IM16-1IN	IM16-2IN
Cord Length	Plug Style	120 Volt	240 Volt
6' 1.8m	2	11PR72T	21PR72T
11' 3.4m	2	11PR132T	21PR132T
16' 4.8m	2	11PR192T	21PR192T

STYLE 1




15amp, 120V




15amp, 240V

Fits most competitor's applications.

STYLE 2



15amp, 120V



15amp, 240V




NOTE: When ordering in-block heater **and** thermocord, place suffix **-WOC** (which stands for **without cord**) after the heater model number to save cost as the standard 6 foot heater cord is replaced by the thermocord harness.

Thermocord for In-Block Direct Immersion heaters

Part No.	Volts	Thread Size	Temp Range
A-2822-ØB	120	.5"	100-120°F (38-49C)
A-2822-ØC	120	.5"	120-140°F (49-60C)
A-2822-ØH	240	.5"	100-120°F (38-49C)
A-2822-ØI	240	.5"	120-140°F (49-60C)
A-2822-ØM	120	.5"	80-100°F (27-38C)
A-2822-ØP	240	.5"	80-100°F (27-38C)

4 ft.
122cm

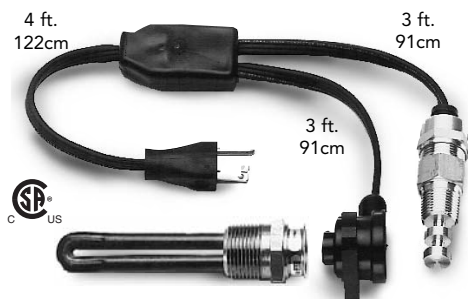

3 ft.
91cm

3 ft.
91cm

Heater shown for illustration purposes only.