



Remote Thermostats for Weathertight and Hazardous Location Oil Heaters (see p.20 for model numbers)

REMOTE THERMOSTATS for OIL HEATERS						Switch Capacity
Weathertight	Hazardous Location	Temperature Range		Sensing Unit	Thread Size	
		ON	OFF			
DIT68	DIT68EP	60°F (16C)	80°F (27C)	LSU-6	1/2" NPT	120 V - 15amp
DIT810	DIT810EP	80°F (27C)	100°F (38C)	LSU-8	1/2" NPT	208 V - 10amp
DIT1012	DIT1012EP	100°F (38C)	120°F (49C)	LSU-10	1/2" NPT	240 V - 10amp
DIT1214	DIT1214EP	120°F (49C)	140°F (60C)	LSU-12	1/2" NPT	277 V - 10amp
						12 V DC } Pilot Duty Only
						24 V DC }

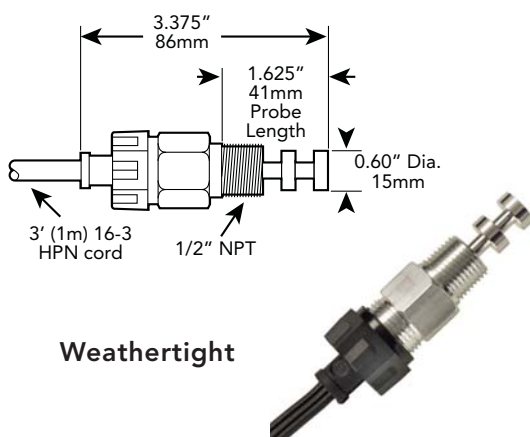

Weathertight

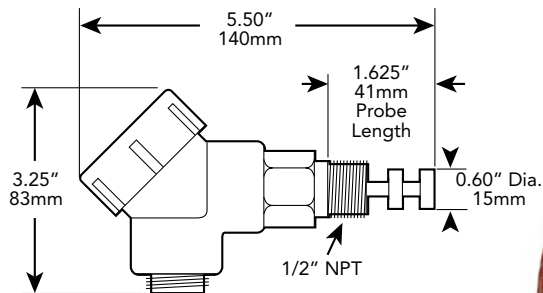

Hazardous Location






Remote Adjustable Thermostat for TPS Thermosiphon Engine Heater (see p.7 for model numbers)

5/8" HB x 5/8" HB

Part Number	Adjustable Range Temperature Setting	Sensing Unit
TFTA-5/8HB	Adjustable 90-130°F (32-54°C)	FSU90-130


Part number does not include "Y" cord

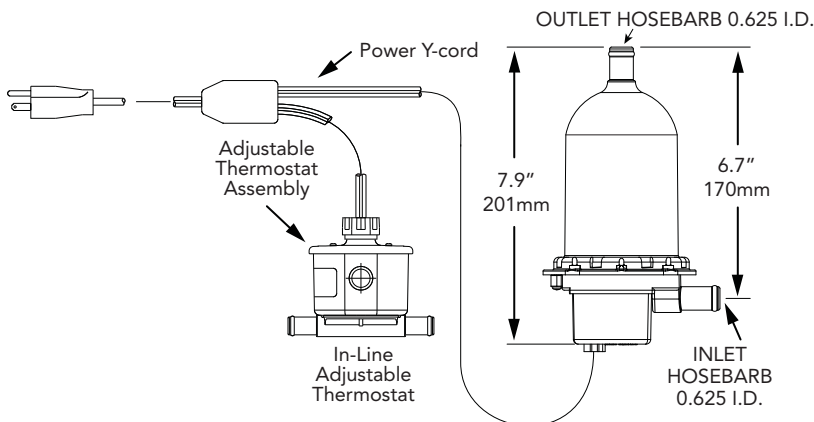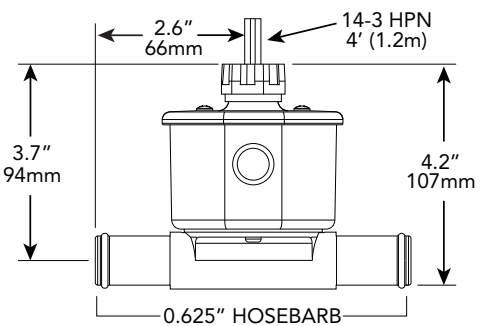

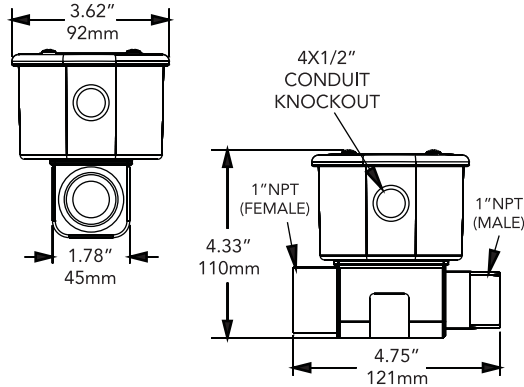


1"NPT female x 1"NPT male CONDUIT TYPE ENCLOSURE

Part Number	Temperature Setting		Maximum Capacity Ratings		
	On	Off	120/240V	277V	480V
TFTC8-200	80°F (27C)	100°F (38C)	25amp	22amp	22amp
TFTC10-200	100°F (38C)	120°F (49C)	25amp	22amp	22amp
TFTC12-200	120°F (49C)	140°F (60C)	25amp	22amp	22amp
TFTCA-200	Adjustable 90-130°F (32-54°C)		25amp	22amp	22amp

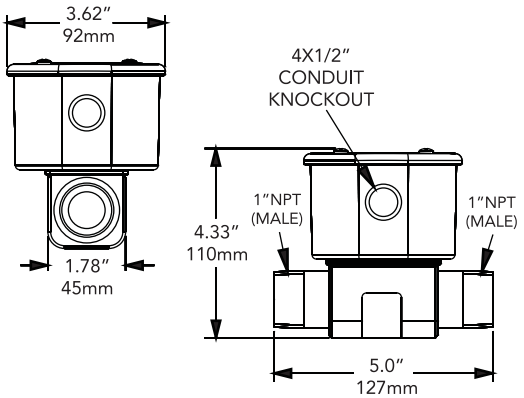


1"NPT male x 1"NPT male CONDUIT TYPE ENCLOSURE

Part Number	Temperature Setting		Maximum Capacity Ratings		
	On	Off	120/240V	277V	480V
TFTC8-220	80°F (27C)	100°F (38C)	25amp	22amp	22amp
TFTC10-220	100°F (38C)	120°F (49C)	25amp	22amp	22amp
TFTC12-220	120°F (49C)	140°F (60C)	25amp	22amp	22amp
TFTCA-220	Adjustable 90-130°F (32-54°C)		25amp	22amp	22amp

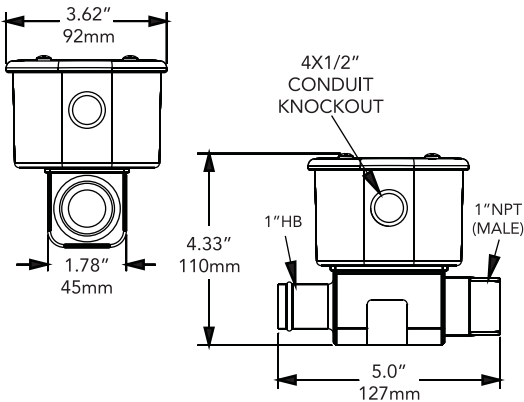

1" hose barb x 1"NPT male CONDUIT TYPE ENCLOSURE

Part Number	Temperature Setting		Maximum Capacity Ratings		
	On	Off	120/240V	277V	480V
TFTC8-240	80°F (27C)	100°F (38C)	25amp	22amp	22amp
TFTC10-240	100°F (38C)	120°F (49C)	25amp	22amp	22amp
TFTC12-240	120°F (49C)	140°F (60C)	25amp	22amp	22amp
TFTCA-240	Adjustable 90-130°F (32-54°C)		25amp	22amp	22amp

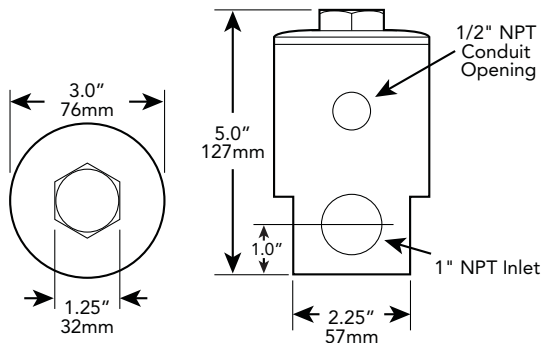

HAZARDOUS LOCATION CONDUIT TYPE ENCLOSURE



Part Number	Temperature Setting		Maximum Capacity Ratings		
	On	Off	120/240V	277V	480V
TFT10ER	100°F (38C)	120°F (49C)	25amp	22amp	22amp

When using a thermostat above rated capacity or on 3 phase applications, select the proper control box with transformer and contactor as shown on page 30.

Temperature Controls



1"NPT female x 1"NPT male CORD CONNECTED

Part Number	Temperature Setting		Maximum Capacity Ratings		
	On	Off	120/240V	277V	480V
TFT8-200	80°F (27C)	100°F (38C)	25amp	22amp	22amp
TFT10-200	100°F (38C)	120°F (49C)	25amp	22amp	22amp
TFT12-200	120°F (49C)	140°F (60C)	25amp	22amp	22amp
TFTA-200	Adjustable 90-130°F (32-54°C)		25amp	22amp	22amp

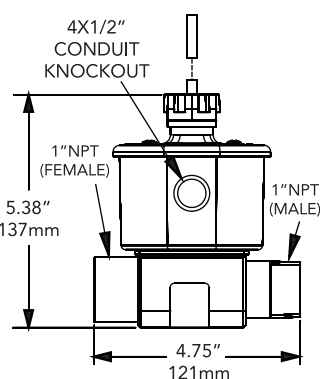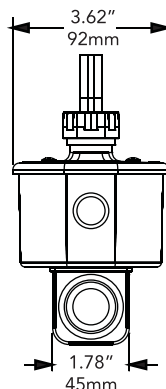



1"NPT male x 1"NPT male CORD CONNECTED

Part Number	Temperature Setting		Maximum Capacity Ratings		
	On	Off	120/240V	277V	480V
TFT8-220	80°F (27C)	100°F (38C)	25amp	22amp	22amp
TFT10-220	100°F (38C)	120°F (49C)	25amp	22amp	22amp
TFT12-220	120°F (49C)	140°F (60C)	25amp	22amp	22amp
TFTA-220	Adjustable 90-130°F (32-54°C)		25amp	22amp	22amp

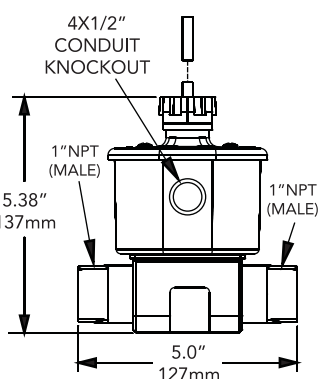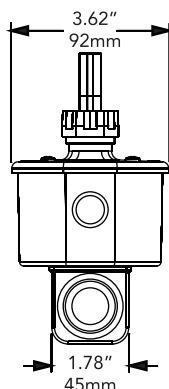

1" hose barb x 1"NPT male CORD CONNECTED


Part Number	Temperature Setting		Maximum Capacity Ratings		
	On	Off	120/240V	277V	480V
TFT8-240	80°F (27C)	100°F (38C)	25amp	22amp	22amp
TFT10-240	100°F (38C)	120°F (49C)	25amp	22amp	22amp
TFT12-240	120°F (49C)	140°F (60C)	25amp	22amp	22amp
TFTA-240	Adjustable 90-130°F (32-54°C)		25amp	22amp	22amp

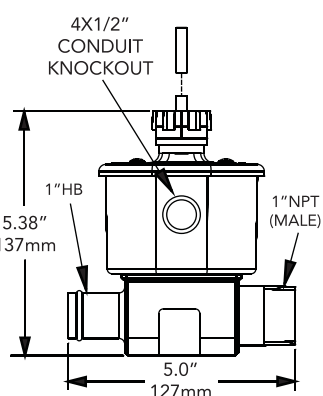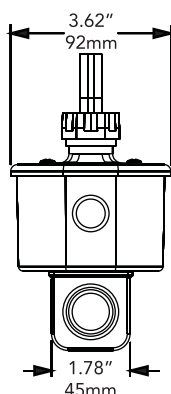

REMOTE ADJUSTABLE With 5' (1.5m) Capillary Probe

Part Number	Adjustable Range Temperature Setting	Maximum Capacity Ratings		
		120/208/240V	277V	480V
AT6525	65 - 250°F (18 - 121°C) (Open or Off Setting) Differential 7°F (-14°C) (Close or On Setting)	25amp	22amp	5amp

ATW
Aluminum
Well for
AT6525



1/2" NPT

