

120R-101653

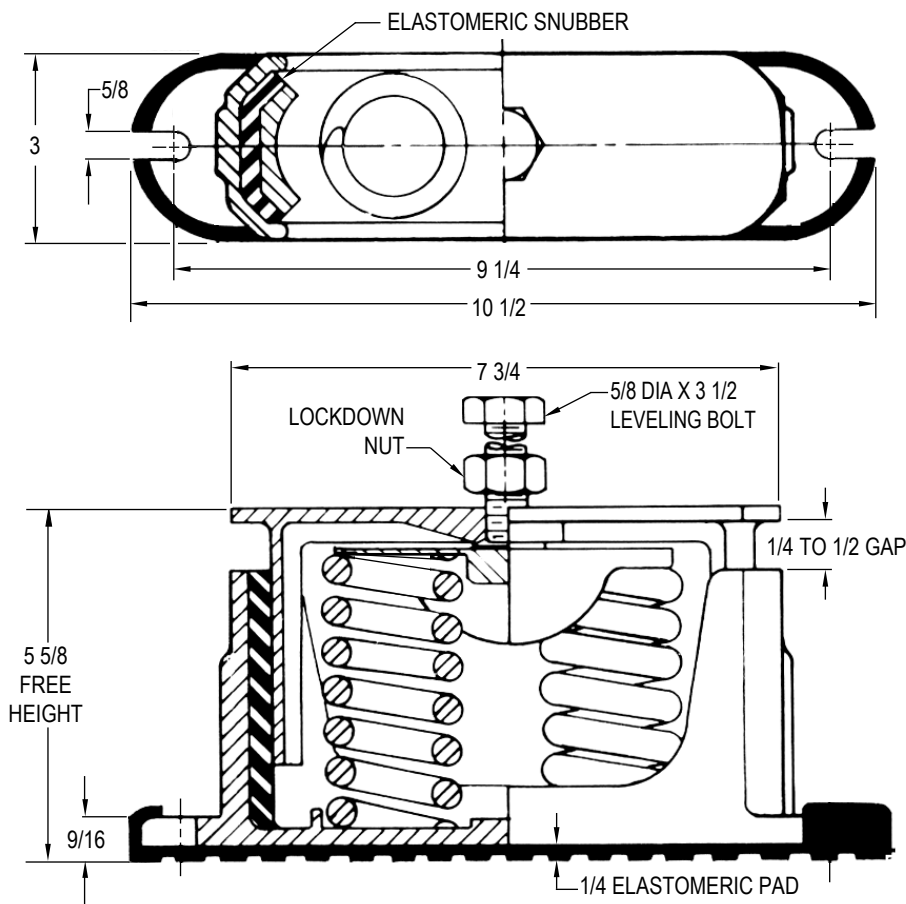
REV.: 4

REV

DESCRIPTION

DATE

BY

**NOTES:**

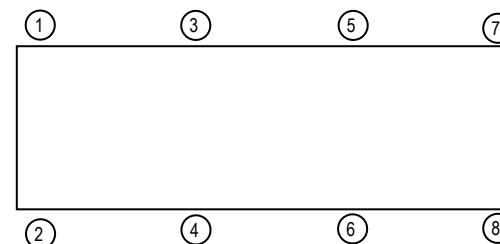
1. ALL DIMENSIONS ARE IN INCHES. INTERPRET PER ANSI Y-14.
2. FINISH: HOUSINGS CAST IRON- ONE COAT BLACK PAINT, SPRINGS- POWDER COAT, HARDWARE- ZINC ELECTROPLATE.
3. REFER TO DRAWING 2 OF 2 FOR INSTALLATION INSTRUCTIONS.
4. INNER SPRING (WHEN USED) NOT SHOWN.
5. ALL SPRINGS ARE DESIGNED WITH 50% OVER-TRAVEL.

TYPE C2E-1D CAST IRON SPRING-FLEX MOUNTINGS WITH EXTERNAL ADJUSTMENT

MODEL	MAX LOAD (LBS)	DEFLECTION (IN)	SPRING RATE (LB/IN)	SPRING COLOR CODE
C2E-1D-680	680	1.13	600	RED
C2E-1D-1020	1020	1.02	1000	BLACK
C2E-1D-1350	1350	1.32	1026	DK PURPLE
C2E-1D-1800	1800	1.02	1762	DK GREEN
C2E-1D-2400	2400	0.90	2654	GRAY
C2E-1D-2720	2720	0.77	3516	WHITE
C2E-1D-3570N ¹	3570	0.88	4058	GRAY/RED

NOTES:

1. TWO NESTED SPRINGS YIELD THIS LOAD. THE COLOR CODE IS FOR OUTER SPRING/ INNER SPRING.

**ISOLATOR SELECTIONS**

LOC 1:	LOC 2:
LOC 3:	LOC 4:
LOC 5:	LOC 6:
LOC 7:	LOC 8:
CUSTOMER EQP'T. TAG:	

NOTE: MATERIAL SHOWN IS FOR (1) SET.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____

CUSTOMER: _____

CUSTOMER PO: _____

SALES ORDER: _____

**SERIES C2E-1D
CAST IRON SPRING-FLEX MOUNTINGS
WITH EXTERNAL ADJUSTMENT
1" NOMINAL DEFLECTION**



THE VMC GROUP
The Power of Together™
Bloomingdale, NJ 07403
Houston, TX 77041

SCALE:

NONE

SHEET:

1 OF 2

DRAWING NO.:

REVISION

Member
VISCMA