


120R-101656 REV.: 5

REV.	DESCRIPTION	DATE	BY

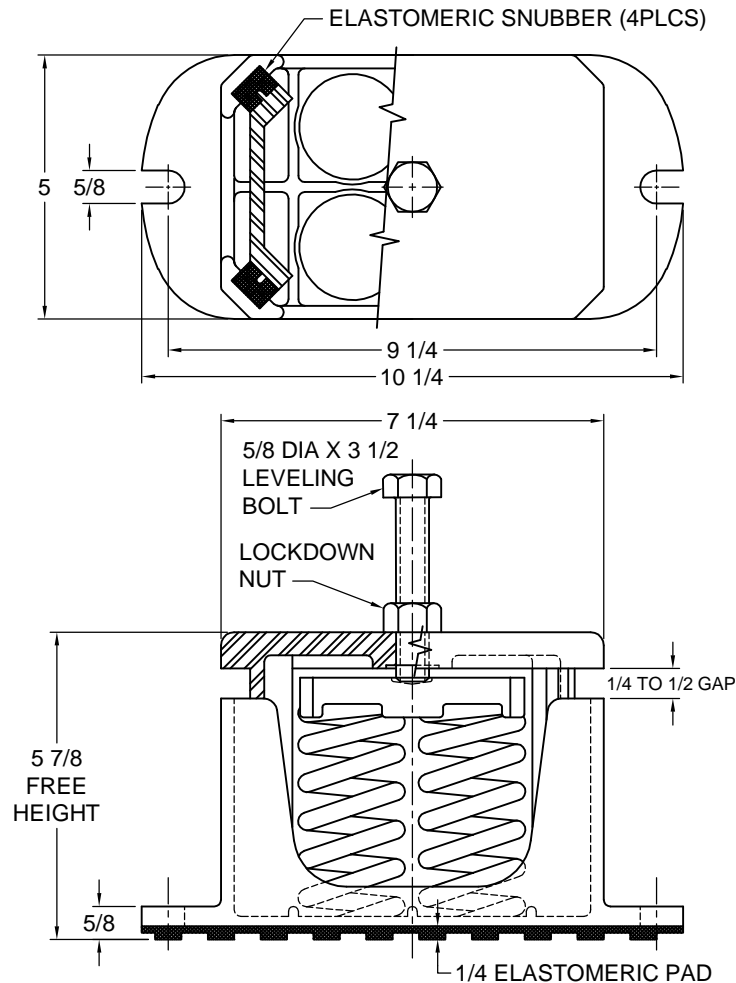

## NOTES:


1. ALL DIMENSIONS ARE IN INCHES, INTERPRET PER ANSI Y14.
2. FINISH: HOUSINGS CAST IRON- ONE COAT BLACK PAINT, SPRINGS-POWER COAT, HARDWARE: ZINC-ELECTROPLATE.
3. REFER TO SHEET 2 OF 2 FOR INSTALLATION INSTRUCTIONS.
4. INNER SPRING (WHEN USED) NOT SHOWN.
5. ALL SPRINGS ARE DESIGNED WITH 50% OVER TRAVEL.

## TYPE C4E-1D CAST IRON SPRING-FLEX MOUNTINGS WITH EXTERNAL ADJUSTMENT

MODEL	MAX LOAD (LBS)	DEFLECTION (IN)	SPRING RATE (LB/IN)	SPRING COLOR CODE
C4E-1D-1360	1360	1.13	1200	RED
C4E-1D-2040	2040	1.02	2000	BLACK
C4E-1D-2700	2700	1.32	2052	DK PURPLE
C4E-1D-3600	3600	1.02	3524	DK GREEN
C4E-1D-4800	4800	0.90	5308	GRAY
C4E-1D-5440	5440	0.77	7032	WHITE
C4E-1D-6000 <sup>1</sup>	6000	0.70	8580	GOLD
C4E-1D-7140N <sup>2</sup>	7140	0.88	8116	GRAY/ RED

## NOTES:

1. FREE HEIGHT IS 1/2" HIGHER FOR THIS SPRING
2. TWO NESTED SPRINGS YIELD THIS LOAD. THE COLOR CODE IS FOR OUTER SPRING/ INNER SPRING

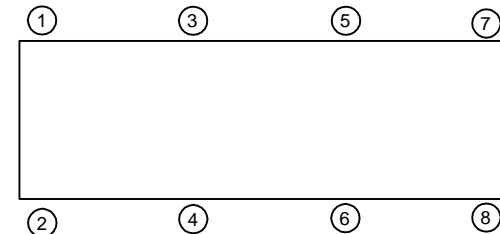

## ISOLATOR SELECTIONS

LOC 1:	LOC 2:
LOC 3:	LOC 4:
LOC 5:	LOC 6:
LOC 7:	LOC 8:
CUSTOMER EQP'T. TAG:	

NOTE: MATERIAL SHOWN IS FOR (1) SET.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

## CERTIFIED FOR:

JOB NAME: \_\_\_\_\_

CUSTOMER: \_\_\_\_\_

CUSTOMER P.O.: \_\_\_\_\_

SALES ORDER: \_\_\_\_\_

**SERIES C4E-1D**  
**CAST IRON SPRING-FLEX MOUNTINGS**  
**WITH EXTERNAL ADJUSTMENT**  
**1" NOMINAL DEFLECTION**



**THE VMC GROUP**  
 The Power of Together  
 Bloomingdale, NJ 07403  
 Houston, TX 77041

## SCALE:

NONE

## SHEET:

1 OF 2

## DRAWING NO.:

## REVISION

