

4


3

2

1


PROPRIETARY
EXCEPT AS OTHERWISE AGREED IN WRITING, THE INFORMATION AND DESIGN DISCLOSED HEREIN ARE THE PROPERTY OF VIBRATION MOUNTINGS AND CONTROLS, INC. AND MUST NOT BE COPIED OR DISTRIBUTED OUTSIDE VMC, INC. EXCEPT TO AUTHORIZED PERSONS WITH A GENUINE NEED-TO-KNOW WHO BY THE USE HEREOF ACKNOWLEDGE VMC, INC. OWNERSHIP AND AGREE TO MAINTAIN THIS INFORMATION AND DESIGN IN STRICT CONFIDENCE.

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	A	INITIAL RELEASE 317	8/9/00	JWW

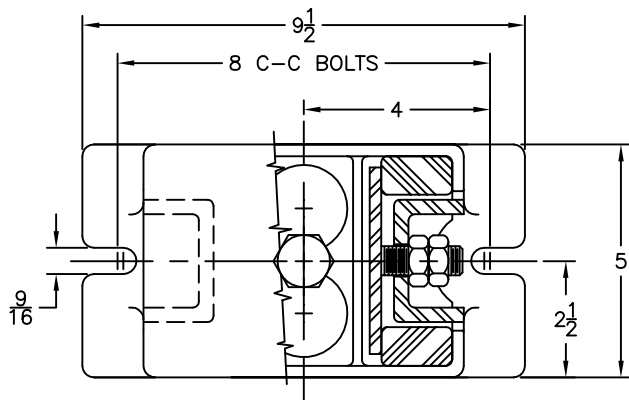

KORFUND PART NUMBER	ISOLATOR MODEL	RATED CAPACITY (POUNDS)		ISOLATOR CONSTANT (LBS/IN.)	MIN. FREE HEIGHT	COLOR CODE
		MAX. STEADY	MAX. IMPACT			
603538-50	LKD-50	100	—	50	5 3/4	YELLOW
603538-51	LKD-51	250	—	125		ORANGE
603538-52	LKD-52	400	—	240		BROWN
603538-53	LKD-53	600	—	380		BLACK
603538-54	LKD-54	1000	—	690		GREEN
603538-55	LKD-55	1400	—	1120		BLUE
603538-56	LKD-56	2400	—	3300	4 3/8	PURPLE
603538-45	LKD-45	650	520	880		BROWN
603538-46	LKD-46	900	720	1600		RED
603538-47	LKD-47	1200	960	2450	4 3/4	PURPLE
603538-57	LKD-57	2200	1650	4260		BLUE
603538-68	LKD-68	2600	2450	5300		GREEN


5/8-11UNC ADJ.
BOLT X 5" LG

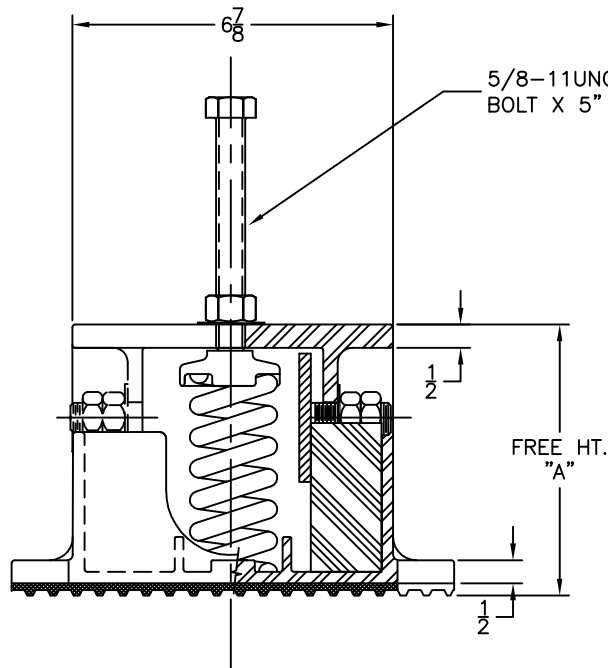

NOTES:

1. STANDARD FINISH: ONE COAT GREEN ENAMEL PAINT ON CAST COMPONENTS. EPOXY POWDER COATED SPRINGS, AND ZINC PLATED HARDWARE.
2. EST. UNIT WEIGHT: 17 LBS
3. MINIMUM OPERATING HEIGHT IS 4 1/2" OR FREE HT.— STATIC SPRING DEFL.

5/8-11UNC SNUBBER ADJ.
STUD, 2 PLCS

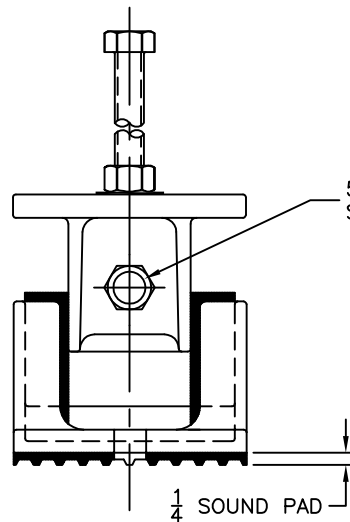

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: 2 PLACE DECIMAL ± .03 FRACTIONS ± 1/16 ANGULAR ± 2° BREAK SHARP CORNERS .005R MAX. R ALL ✓ SURFACES TO BE ✓		CONTR NO BY OR APPROVED DATE CHK L NEU 7/20/00 DESIGN ENGRG F ANDREWS 8/9/00 ENGRG PROJ QA R. MANTEI 8/9/00 MFG T. POSPISIL 8/9/00	DATE 6/24/93 7/20/00 8/9/00 8/9/00 8/9/00 8/9/00 8/9/00	KORFUND DYNAMICS AN ARK COMPANY NJ 07403 A UNIT OF VMC	LKD ISOLATOR ASSEMBLY	SIZE C	CAGE CODE 07941	DWG NO 603538	REV A
APPLICATION		SCALE 1/2		DO NOT SCALE DRAWING		SHEET 1 OF 2			

4

3

2

1