




STYLE A - STEEL PLATE
BONDED BETWEEN NRC AND
FLATBACK PADS

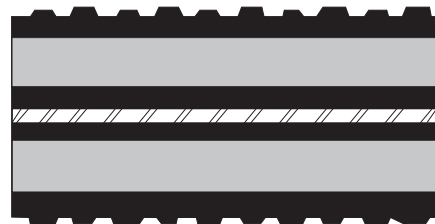


STYLE E - GALVANIZED STEEL
PLATE BONDED BETWEEN
MULTIPLE NRC PADS

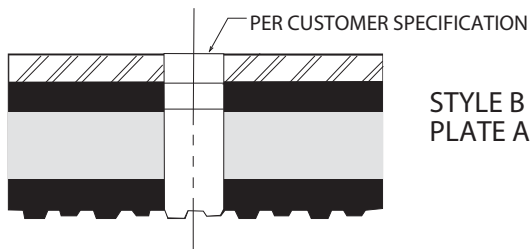

STYLE B - NRC WITH LOAD
PLATE AND HOLE

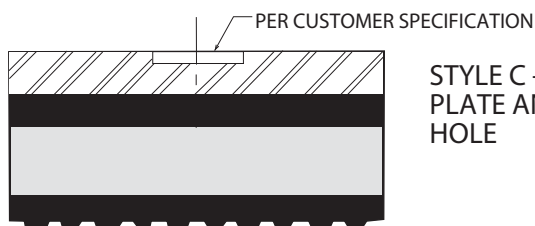

STYLE C - NRC WITH LOAD
PLATE AND COUNTER-BORED
HOLE

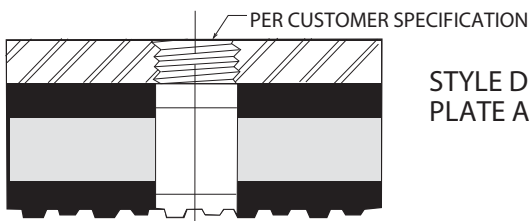

STYLE D - NRC WITH LOAD
PLATE AND TAPPED HOLE

SIZE	LENGTH (IN.)	WIDTH (IN.)	HEIGHT FOR STYLE (IN.)					LOAD RANGE
			A	B	C	D	E	
22	2	2	1-1/2	1-1/4	1-3/8	1-3/8	2-1/16	20-240
33	3	3	1-1/2	1-1/4	1-3/8	1-3/8	2-1/16	45-540
44	4	4	1-1/2	1-1/4	1-3/8	1-3/8	2-1/16	80-960
55	5	5	1-1/2	1-1/4	1-1/2	1-1/2	2-1/16	125-1500
66	6	6	1-1/2	1-1/4	1-1/2	1-1/2	2-1/16	180-2160
88	8	8	1-5/8	1-3/8	1-5/8	1-5/8	2-1/16	320-3840
99	9	9	1-5/8	1-3/8	1-5/8	1-5/8	2-1/16	405-4860

NOTES:

1) CUSTOM SIZES AVAILABLE UPON REQUEST.



OTHER MATERIALS, COMPOUNDS OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR

PURCHASER _____
ORDER NO. _____
PROJECT _____

MODEL: SP-NRC FLEX-PLATE
VIBRATION ISOLATOR
STYLES A, B, C, D AND E

SCALE NONE

DATE


DWG. NO.

P-1021

REV.

3

07/05

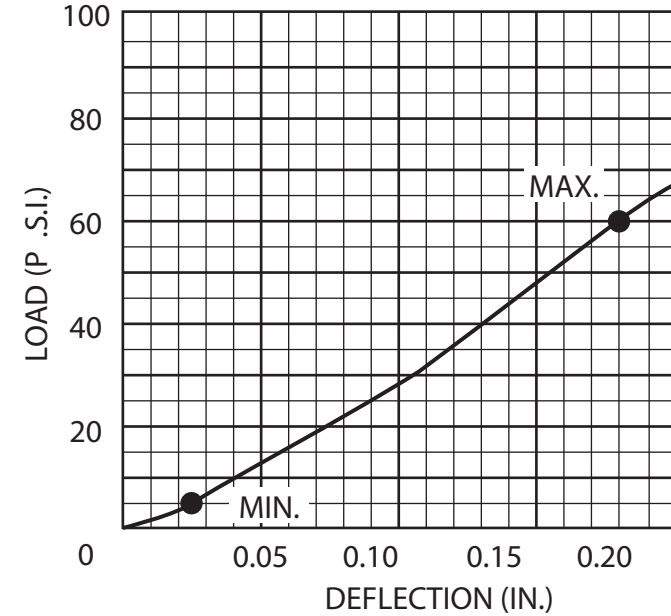

SPECIFICATIONS:

MATERIALS: RIBBED ELASTOMERIC FACE SHEETS, ALTERNATE HIGH AND LOW RIBS, 3 PER INCH,
BONDED TO 1/2" SOUND/VIBRATION ABSORBING PAD.

THICKNESS: 1"
RECOMMENDED LOADING: 5-60 P.S.I.
DEFLECTION: 0.025" TO 0.18"

NOTES:

1) AVAILABLE IN 36" X 36" SHEETS AND ALSO IN SMALLER SIZES CUT TO ORDER.

SIZE	LOAD RANGE
2 X 2	20 - 240
3 X 3	45 - 540
4 X 4	80 - 960
5 X 5	125 - 1500
6 X 6	180 - 2160
8 X 8	320 - 3840
9 X 9	405 - 4860



OTHER MATERIALS, COMPOUNDS OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR

PURCHASER —————
 ORDER NO. —————
 PROJECT —————
 —————

**MODEL: NRC
PAD ISOLATOR**

SCALE NONE

DATE

DWG. NO.

P-1020

REV.

4

06/05