




Shown with Wire Leads – Electrical Option **WL**

Features

- Utilizes bellows mechanism to sense temperature
- High quality snap action switch
- Factory preset
- Shock and vibration resistant
- Available in a wide range of configurations
- NEMA 4, 13

Dimensions

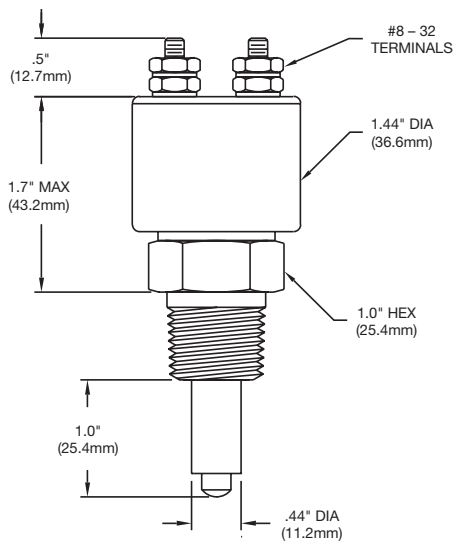

Operating Specifications

Set Point Range	40° – 300°F	(4° – 149°C)
Set Point Tolerance	±5°F	(2.8°C)
Maximum Temperature	100°F above set point (325°F max)	
Differential	8 – 16°F	
Current Rating	10 A @ 125/250 VAC	
	5 A @ 30 VDC	
Media Connection	See Order Chart Below for Options	
Circuit Form	SPST-NO or SPST-NC	
Electrical Connection	See Order Chart Below for Options	
Maximum External Pressure	500 PSI	

How to Order

Example: Part Number: **HT – 2A – 100R /**

HT – 2A – 100R / *				
Media Connection	Circuit Form	Fixed Set Point	Set Point Direction	Electrical Options
1 1/2" NPT Male	A SPST-NO	40°F – 300°F	R Rising	WL Wire Leads 18"
2 3/8" NPT Male	B SPST-NC		F Falling	QC 1/4" Spade Connection
6 M16 x 1.5	C SPDT			WP Weather Pack
7 1/2" BSPP Male (G1/2)				HR DIN43650A Connector
				MP Metri-Pack
				AH 25 A @ 277 VAC
				5 A @ 30 VDC
				GG Internal Ground
				AU Gold Plate/Alloy for low currents

* Defaults to Screw Terminals