




ARI2 AND AR24-A CUBE RELAY

CIRCUIT CONFIGURATION

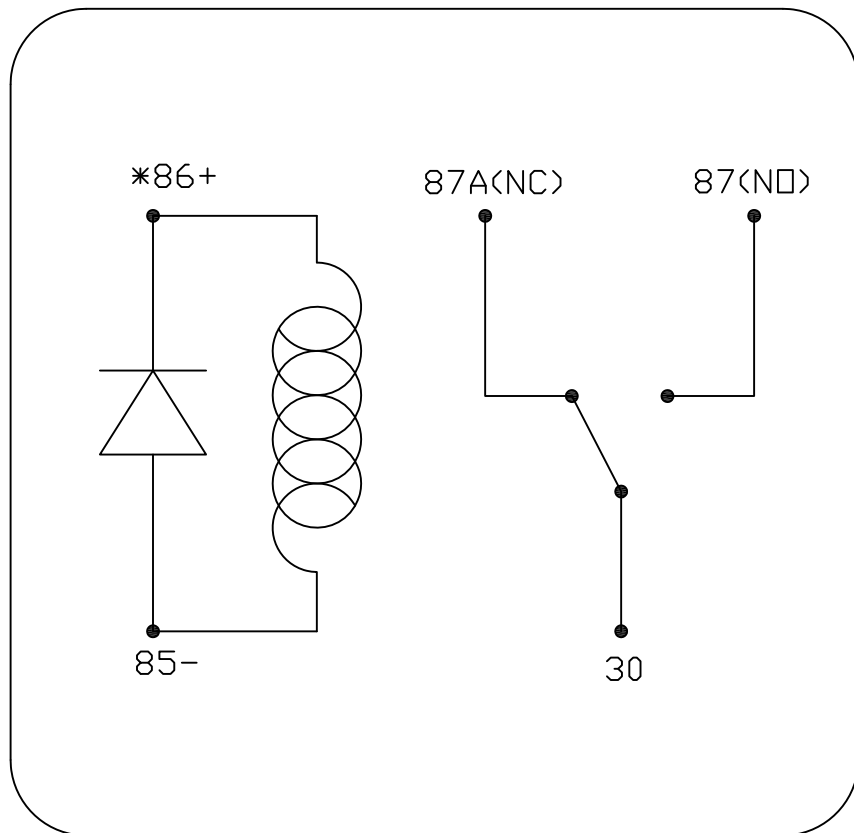

PHYSICAL ORIENTATION

BOTTOM VIEW / FRONT

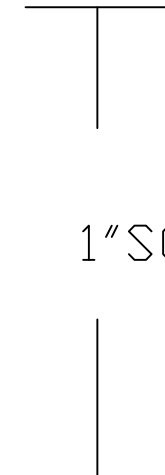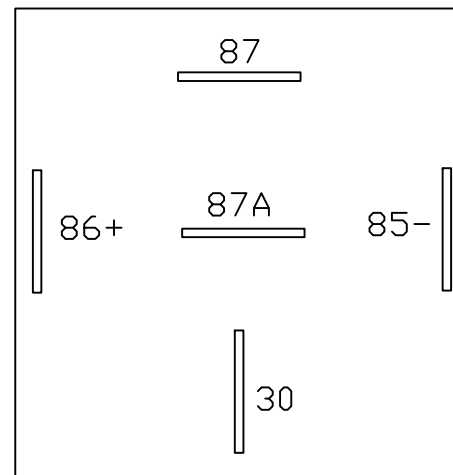

1" SQUARE

MOUNTING TAB SIDE

12VDC CUBE RELAY

MODEL: ARI2 (PICKER PC792A-IC-CI-12S-DN-X)

CONTACT RATINGS: NO 40A/14DC NC 30A/14VDC

24VDC CUBE RELAY

MODEL: AR24-A (PICKER PC792A-IC-CI-24S-DN-X)

CONTACT RATINGS: NO 20A/24DC NC 15/24VDC

*CONNECT DC+ COIL TRIGGER VOLTAGE TO TERMINAL 86

NOTES: FOR DAVIDSON SALES PART NUMBER ARI2 AND AR24-A
STANDARD DC RELAY USED IN PANELSOURCE CONTROL PANELS

UNLESS OTHERWISE
SPECIFIED:

ALL WIRES 16GA

DO NOT SCALE DRAWING

Panelsource
ENGINE & GENERATOR CONTROLS

TITLE:
ARI2 / AR24-A
RELAY 86+

DRAWN BY:
TE

SCALE:
NTS

CHECKED:

DATE:
18-JUL-017

DRAWING NUMBER:
RELAY86+

SHEET 1 OF 1