

Measurement drawing and switch program


Product line S600

Front mounting and base mounting
switch type S612 (8 stages, 15 contacts)
with auxiliary switch type M221 (5 stages, 9 contacts)
H-padlock device black, legend plate silver,
switching angle 90°, 3 positions padlockable
(09h/ 12h/ 03h), degree of protection IP 55

Switch programm see page 2
technical data see switch catalog

Salzer part no. **S612-SE3587**



Inscription of legend plate

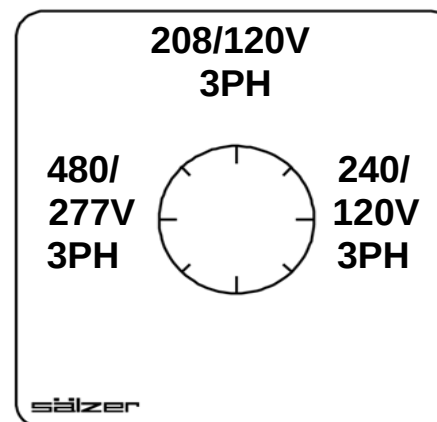

All terminal lugs are prepared for screws M10


Dimensions (inch/ mm)

Type		A1	A2	C1	D	D _{lugs}	D1	D2	E/E1	L1	L2
S612-SE3587	inch	3.86	5.59	3.27	3.46	5.91	0.59	0.22	2.68	11.85	3.66
	mm	98	142	83	88	150	15	5,5	68	301	93

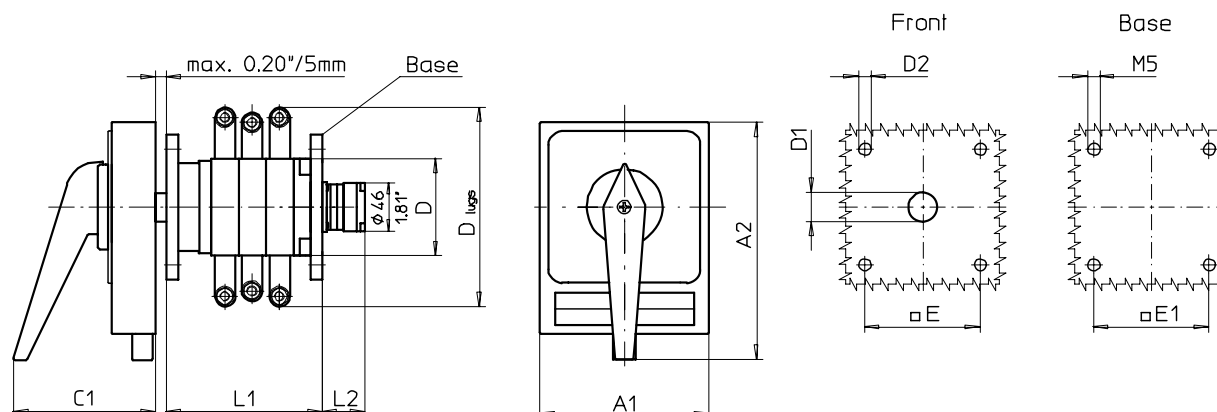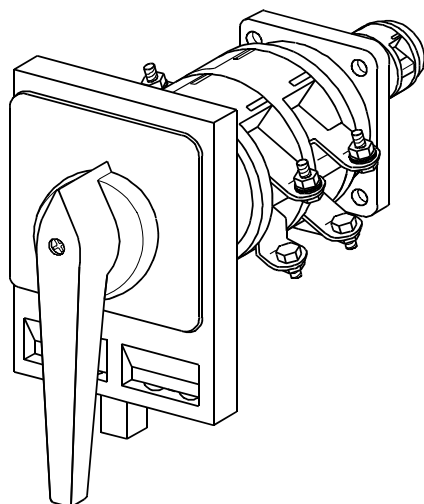

Measurement drawing and switch program

Salzer part no. S612-SE3587 for complete switch

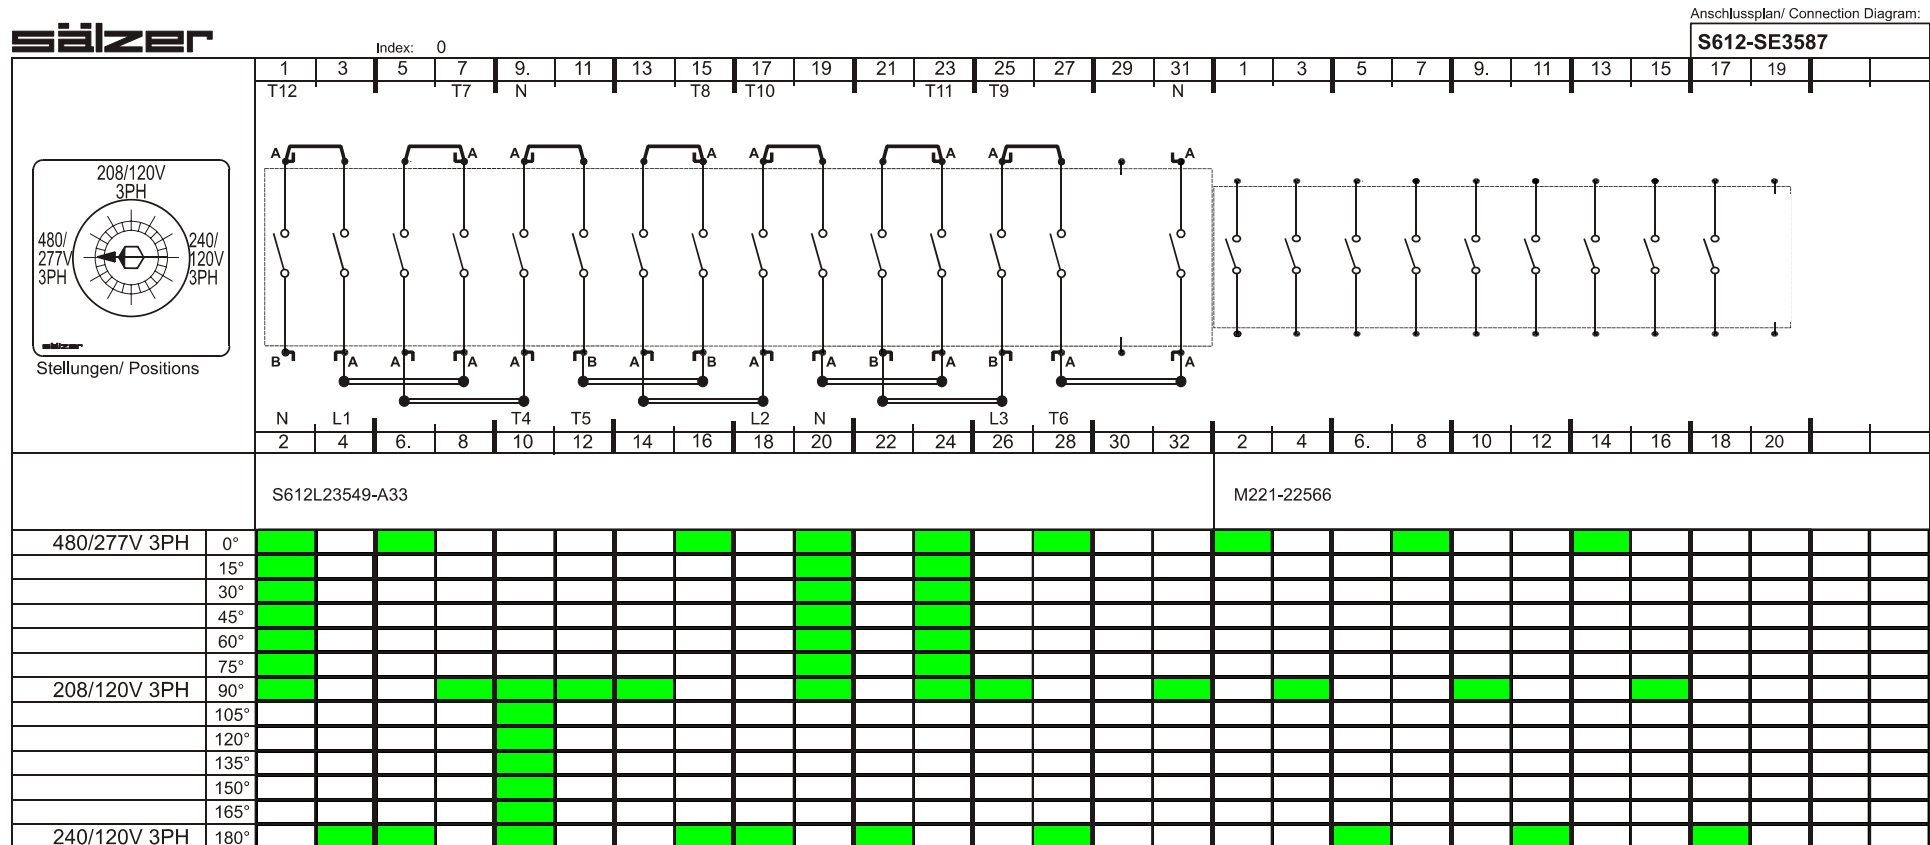

Voltage Changeover Switch for Marathon Generators 101kW, 1 Breaker Output

Connect directly: L1-T1, L2-T2, L3-T3

High (Series) Wye 480/277V 3PH Y

L1-T1
L2-T2
L3-T3
T4-T7
T5-T8
T6-T9
N-T10-T11-T12

Low (Parallel) Wye 208/120V 3PH YY

L1-T1-T7
L2-T2-T8
L3-T3-T9
N-T4-T5-T6
N-T10-T11-T12

High (Series) Delta 240/120V 3PH Δ

L1-T1-T12
L2-T2-T10
L3-T3-T11
N-T4-T7 (TAPP)
T5-T8
T6-T9