

Measurement drawing and switch program

Product line S800

Front mounting and base mounting

switch type S825 (5 contact stages, 9 contacts)

with auxiliary switch type M221 (2 contact stages, 4 contacts)

H-padlock device black, legend plate silver,

switching angle 90°, 2 positions padlockable (12h/ 09h)






Degree of protection IP55

Switch program see page 2

technical data see switch catalog

Salzer part no.

S825-SE2617

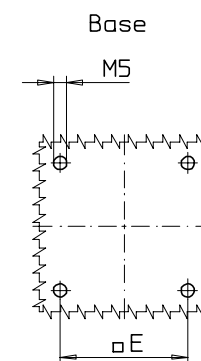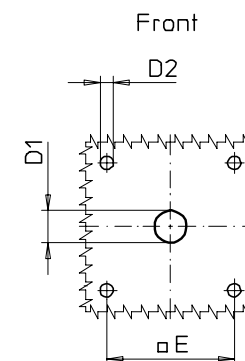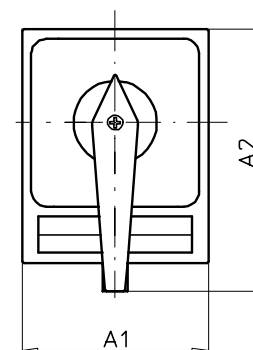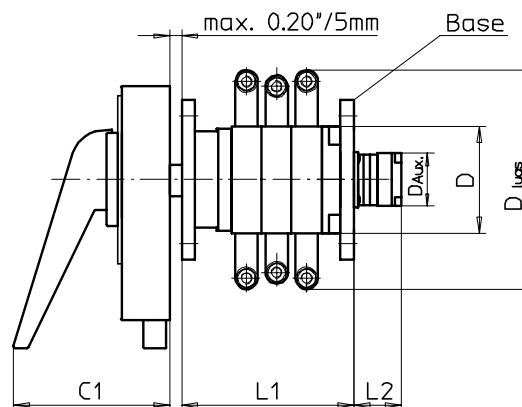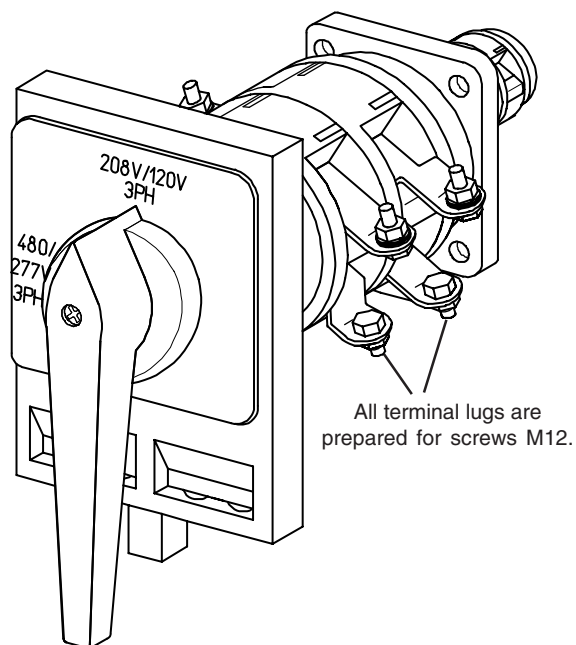

Dimensions (inch/ mm)


Type		A1	A2	C1	D _{Aux.}	D	D _{lugs}	D1	D2	E	L1	L2
S825-SE2617	inch	5.11	6.92	3.66	1.81	4.72	8.26	0.79	0.22	4.09	9.45	2.13
	mm	130	176	93	46	120	210	20	5,5	104	240	54

Salzer part no. **S825-SE2617** for complete switch

sälzer

Anschlussplan/ Connection Diagram:

S825-SE2617

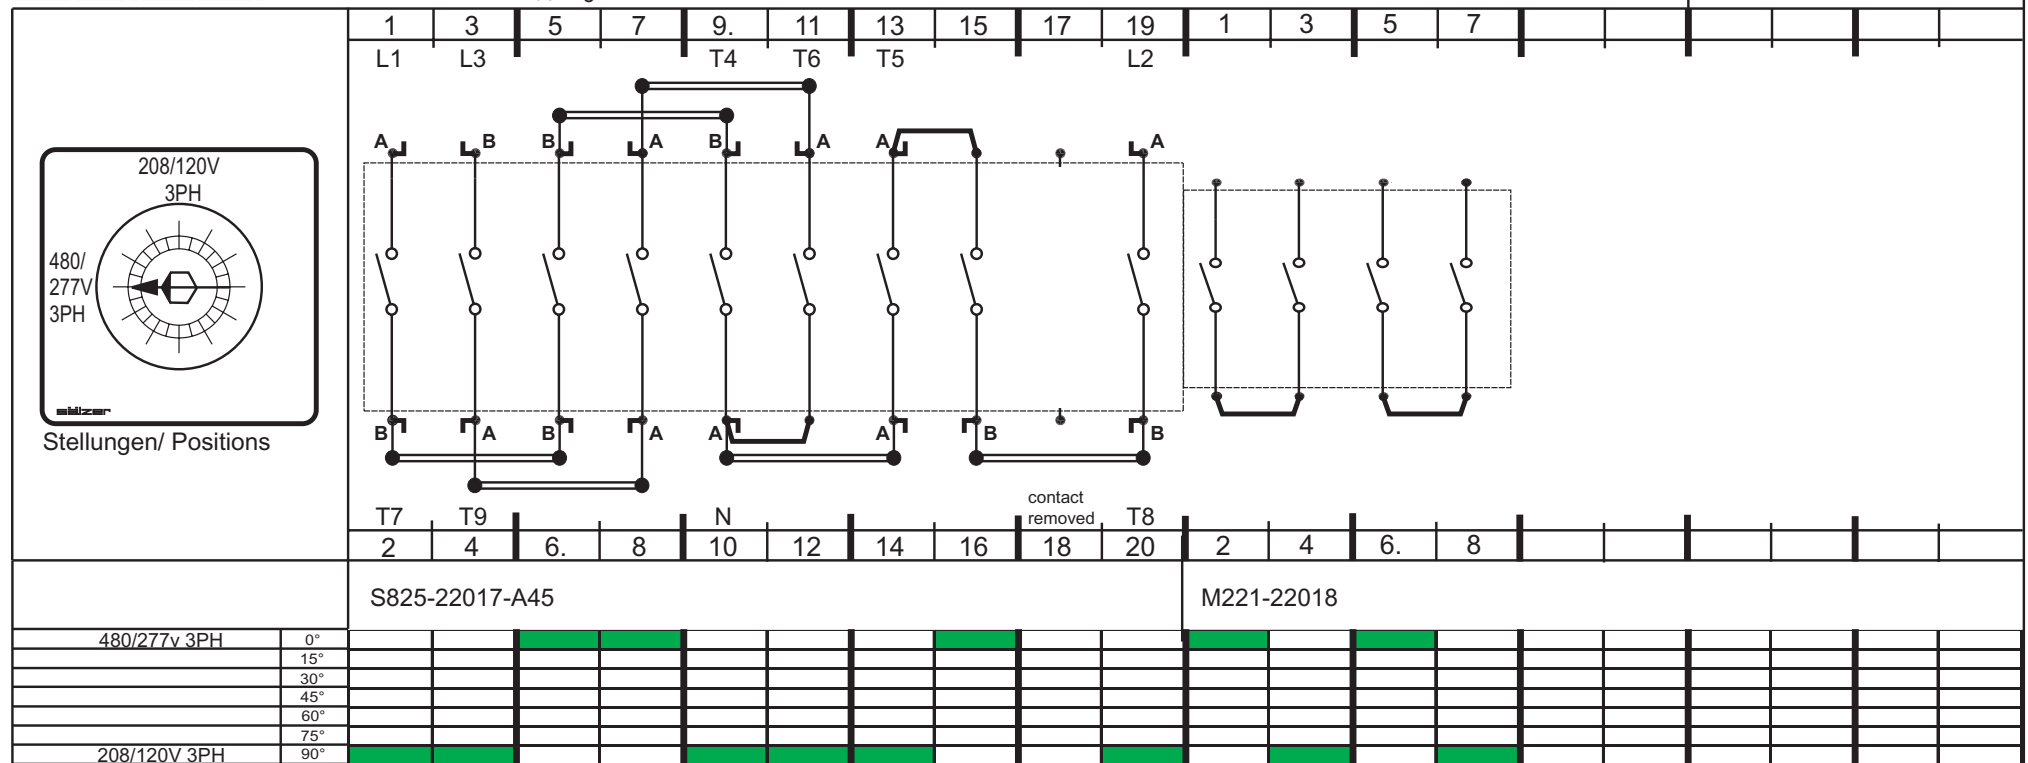

**Voltage Changeover Switch, for Generators 181kW,
1 Breaker Output**

Connect directly: L1-T1, L2-T2, L3-T3,
N-T10-T11-T12

**High (Series) Wye
480/277V 3PH Y**

L1-T1
L2-T2
L3-T3
T4-T7
T5-T8
T6-T9
N-T10-T11-T12

**Low (Parallel) Wye
208/120V 3PH YY**

L1-T1-T7
L2-T2-T8
L3-T3-T9
N-T4-T5-T6
N-T10-T11-T12