

Measurement drawing and switch program




Product line S800

Front mounting and base mounting
switch type S825 (11 stages, 21 contacts)
with auxiliary switch type M221 (5 stages, 9 contacts)
H-padlock device black, legend plate silver,
switching angle 90°, 3 positions padlockable
(09h/ 12h/ 03h), degree of protection IP 55

Switch programm see page 2
technical data see switch catalog

Salzer part no. S825-SE3924




Inscription of legend plate

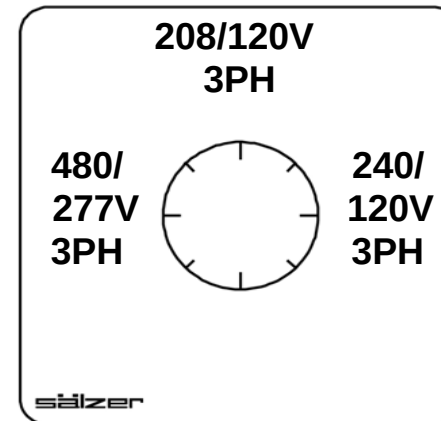

Dimensions (inch/ mm)


Type		A1	A2	C1	D	D _{lugs}	D1	D2	E/E1	L1	L2
S825-SE3924	inch	5.11	6.92	3.66	4.72	8.26	0.79	0.22	4.09	17.96	3.66
	mm	130	176	93	120	210	20	5,5	104	456	93

All terminal lugs are prepared for screws M12

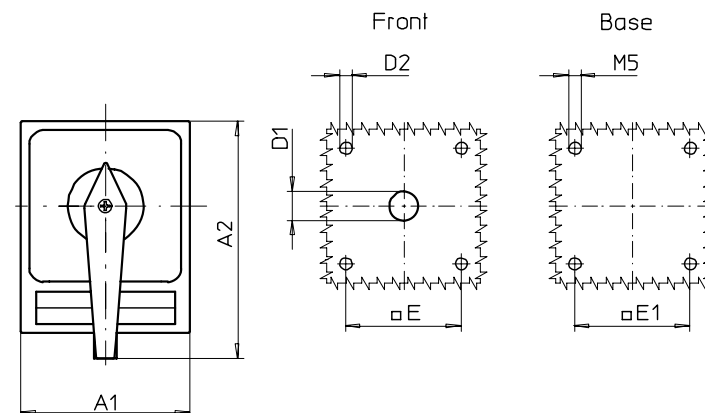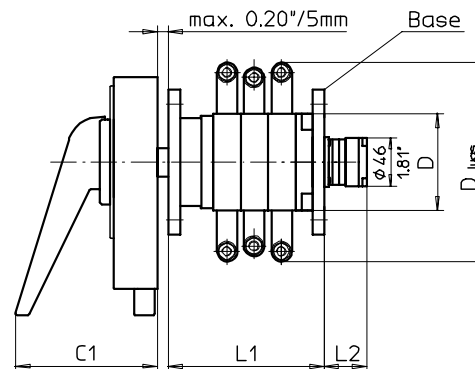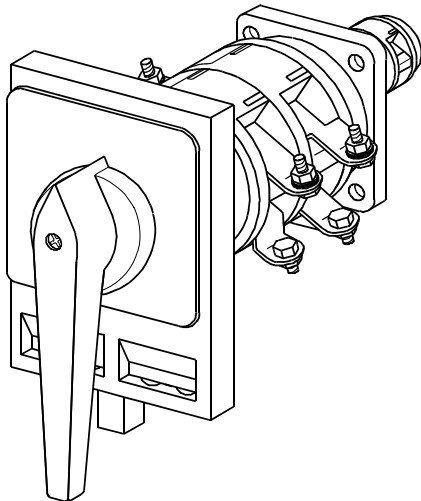

Measurement drawing and switch program

Salzer part no. S825-SE3924 for complete switch

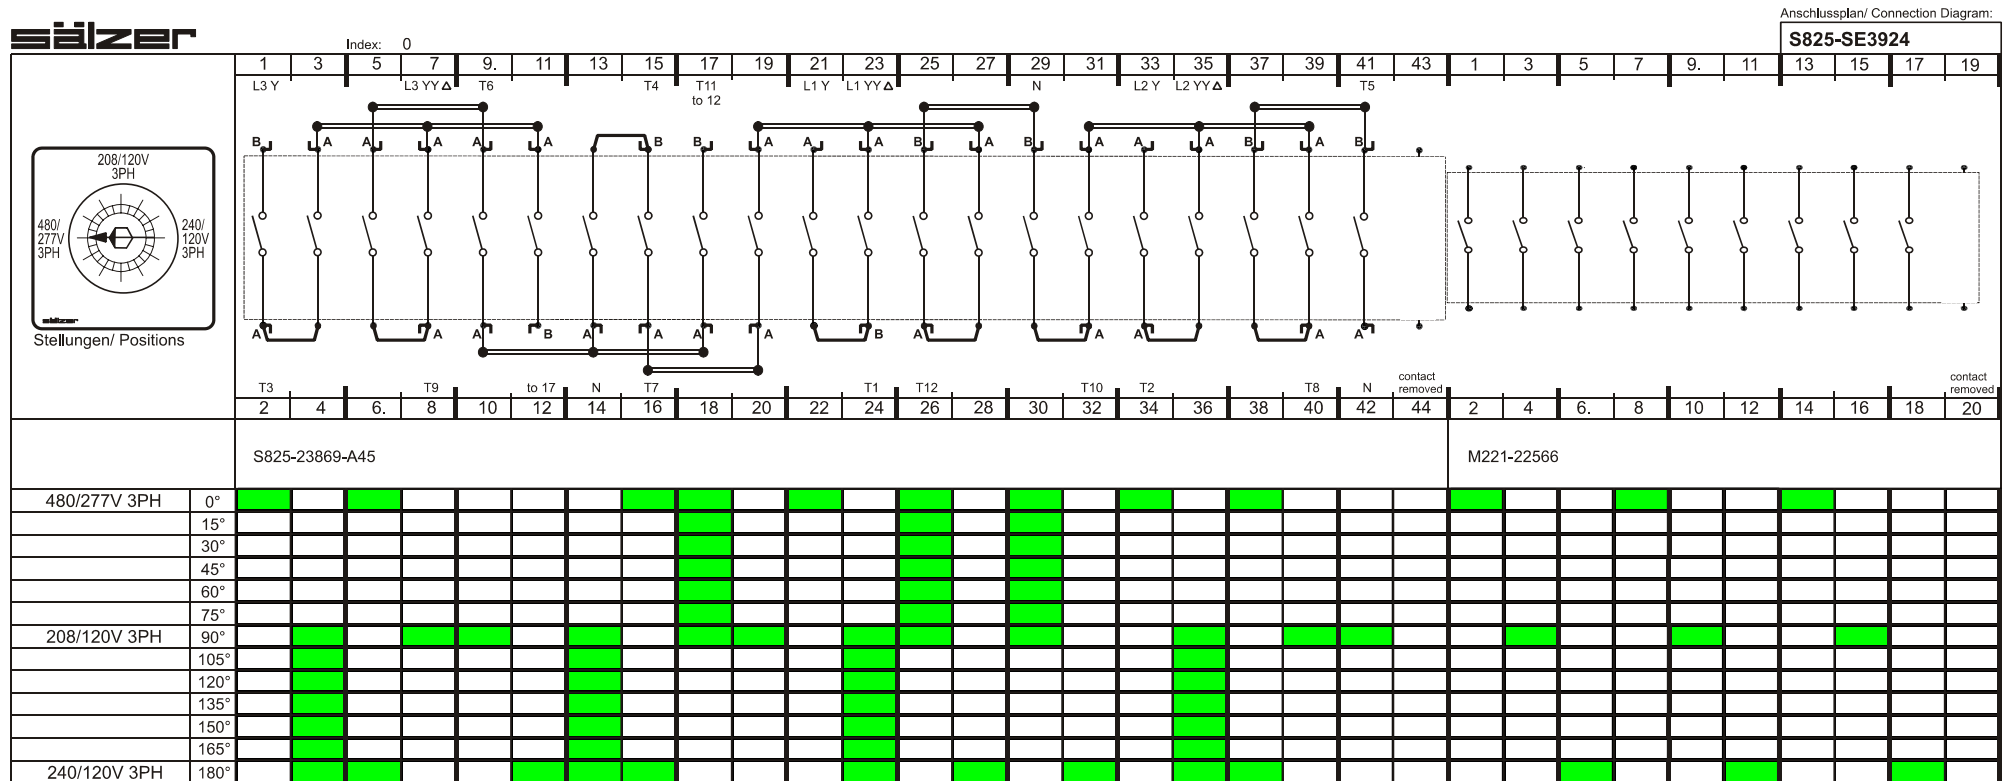

Voltage Changeover Switch for Marathon Generators 181kW, 2 Breaker Outputs

Wire jumper installed by customer: 12 to 17

High (Series) Wye 480/277V 3PH Y

L1-T1
L2-T2
L3-T3
T4-T7
T5-T8
T6-T9
N-T10-T11-T12

Low (Parallel) Wye 208/120V 3PH YY

L1-T1-T7
L2-T2-T8
L3-T3-T9
N-T4-T5-T6
N-T10-T11-T12

High (Series) Delta 240/120V 3PH Δ

L1-T1-T12
L2-T2-T10
L3-T3-T11
N-T4-T7
T5-T8
T6-T9