


Product line S800

Front mounting and base mounting
switch type S825 (10 stages, 19 contacts)
with auxiliary switch type M221 (3 stages, 6 contacts)
H-padlock device black, legend plate silver,
switching angle 90°, 3 positions padlockable
(09h/ 12h/ 03h), degree of protection IP 55

Switch programm see page 2
technical data see switch catalog

Salzer part no. S825-SE4275




Inscription of legend plate

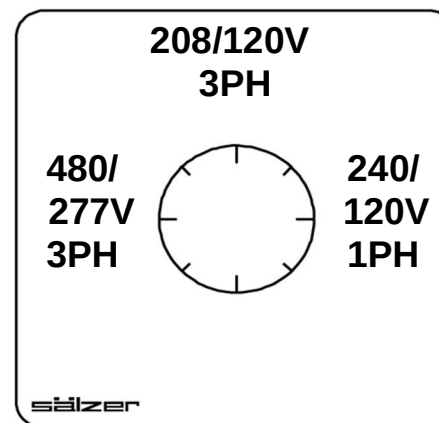

All terminal lugs are prepared for screws M12

Dimensions (inch/ mm)


Type		A1	A2	C1	D	D _{lugs}	D1	D2	E/E1	L1	L2
S825-SE4275	inch	5.11	6.92	3.66	4.72	8.26	0.79	0.22	4.09	16.54	3.66
	mm	130	176	93	120	210	20	5,5	104	420	93

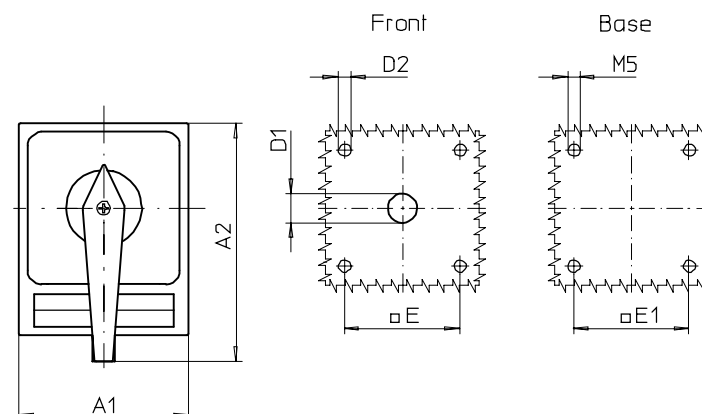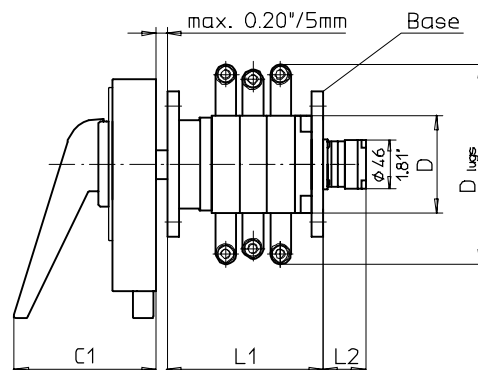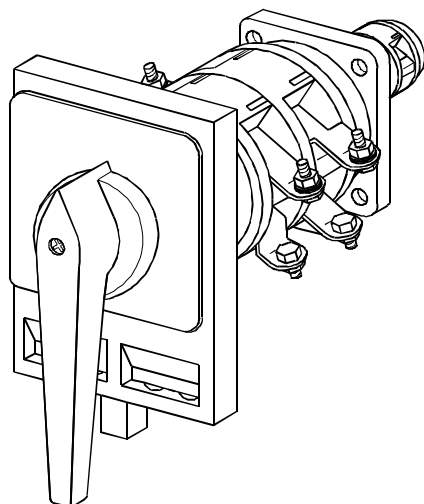

Measurement drawing and switch program



Salzer part no. S825-SE4275 for complete switch

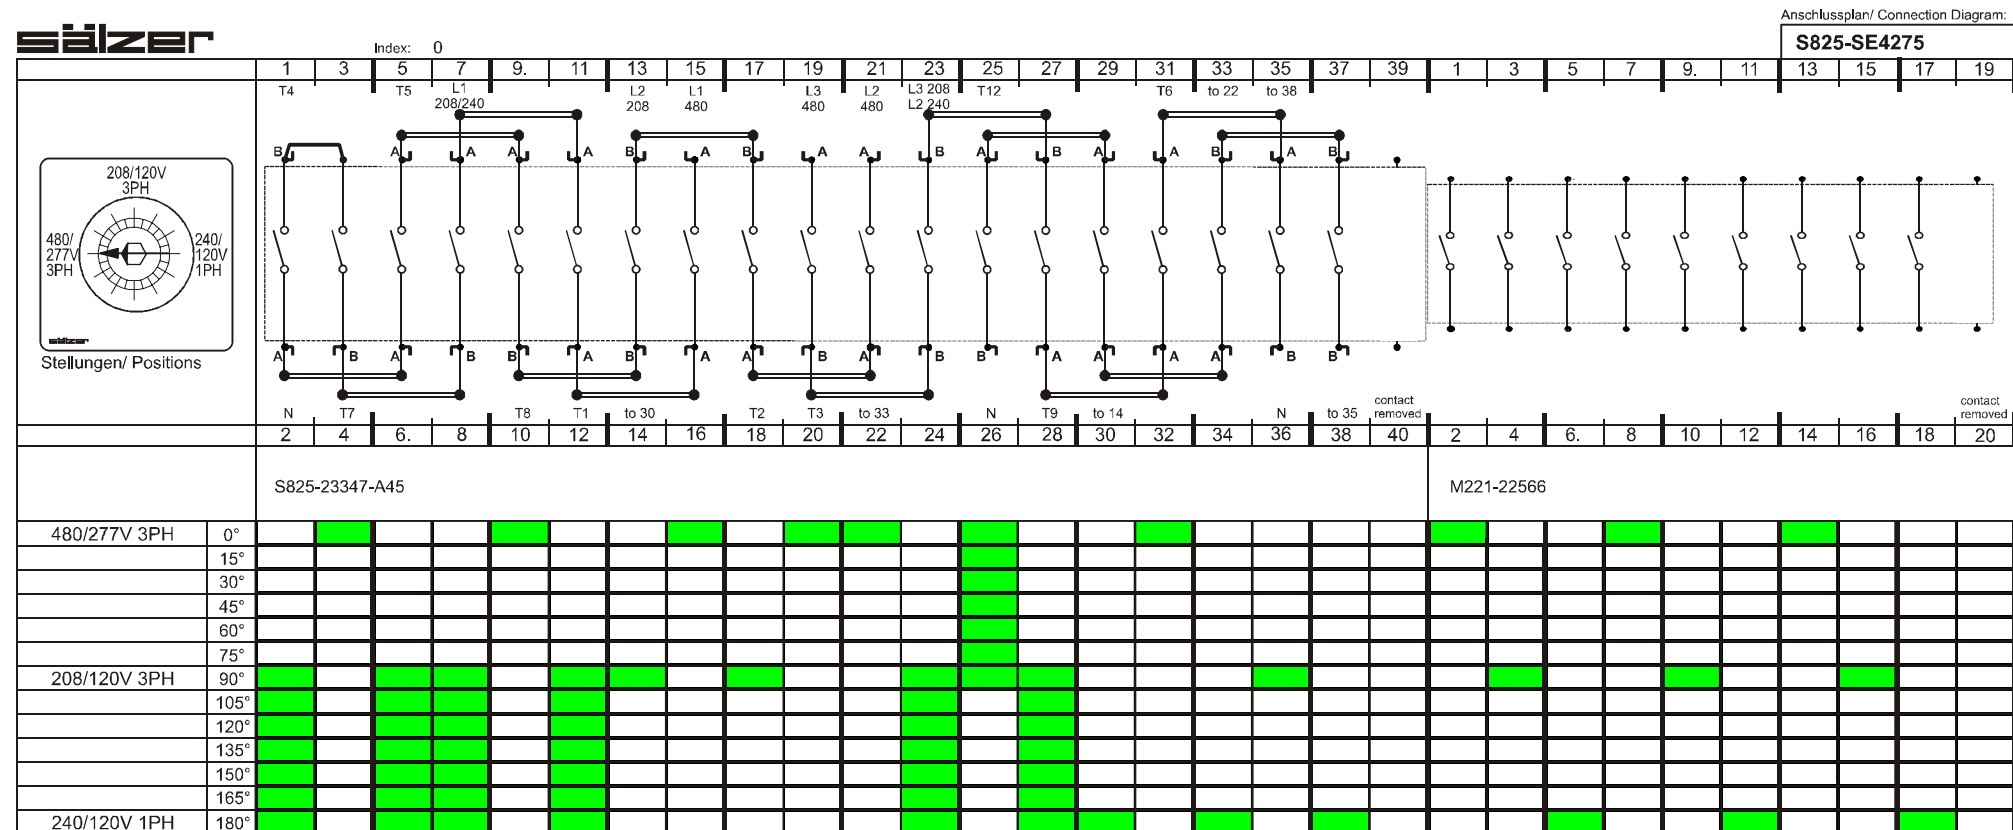

Voltage Changeover Switch for Lima Generators 181kW, 2 Breaker Outputs

Connect directly: N-T10-T11

Wire jumpers installed by customer: 14 to 30, 22 to 33, 35 to 38

High (Series) Wye 480/277V 3PH Y

L1-T1
L2-T2
L3-T3
T4-T7
T5-T8
T6-T9
N-T10-T11-T12

Low (Parallel) Wye 208/120V 3PH YY

L1-T1-T7
L2-T2-T8
L3-T3-T9
N-T4-T5-T6
N-T10-T11-T12

Low (Parallel) Zig Zag 240/120V 1PH ZZ

L1-T1-T7
L2-T3-T9
T2-T6-T8-T12
N-T4-T5-T10-T11